

XPLOR
LIGHTING

BLACKOUT COMBO SERIES


SIDELINE COMBO

The **SIDELINE COMBO** brings the same power as the **SIDELINE** but with a twist.

The **SIDELINE COMBO** has additional amber LED marker lights with both constant and flash capabilities. Powered by 7 OSRAM 10 watt LEDs, for a total of 70 watts. The side LEDs throw a broad pattern that's perfect for ditch lights. Available in spot or flood optics, these lights emit a bright white 5700K beam in addition to the amber functions. The **SIDELINE** is a unique size and shape.



- Impact and scratch resistant hard coated clear polycarbonate UV coated lens
- Automatic pressure equalizing vent for maintenance free travel
- Texture black powder coat stainless steel mounting bracket and black stainless steel hardware
- High pressure cast aluminum alloy housing for clean looks and functional heat sink

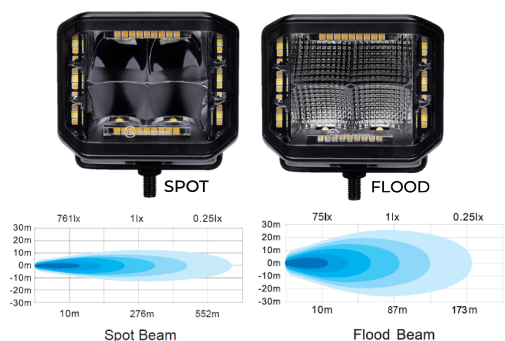

LED Chip	OSRAM 7pcs @ 10W
Power	70W
Raw Lumen	8400 lm
Voltage	10-30V DC
Amp Draw	1.60/12V – 0.85/24V
Color Temperature	5700K
Beam Pattern	Spot & Flood
Mount	Surface Mount



NO DRILL
EASY INSTALL



XPLOR LIGHTING


BLACKOUT COMBO SERIES SIXLINE COMBO

The SIXLINE COMBO is powered by 6 OSRAM 5 watt LEDs, for a total of 30 watts.

Available in spot or flood optics, these lights emit a bright white 6000K beam with the added functionality of both constant and flash amber marker lights. With a versatile single stud mount, the SIXLINE can be installed virtually anywhere. The SIXLINE is also available with a flush mount bezel option.



- Impact and scratch resistant hard coated clear polycarbonate UV coated lens
- Automatic pressure equalizing vent for maintenance free travel
- Texture black powder coat stainless steel mounting bracket and black stainless steel hardware
- High pressure cast aluminum alloy housing for clean looks and functional heat sink

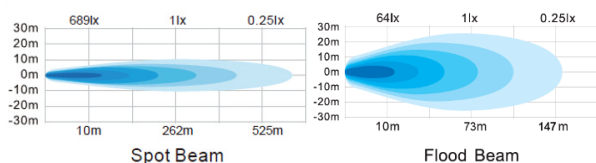

LED Chip	OSRAM 6pcs @ 5W
Power	30W
Raw Lumen	2880 lm
Voltage	10-30V DC
Amp Draw	1.86/12V – 0.95/24V
Color Temperature	6000K
Beam Pattern	Spot & Flood
Mount	Single threaded stud



NO DRILL
EASY INSTALL



XPLOR LIGHTING

BLACKOUT COMBO SERIES

DOUBLELINE COMBO


The DOUBLELINE COMBO LED Light Bar, is one of the nicest looking light bars on the planet.

Available in three lengths 21.5", 30", 40" and 50" with power outputs ranging from 200, 300, 400 & 480 watts are available with additional white and amber marker lights, in both constant and flash functionality!

- Impact and scratch resistant hard coated clear polycarbonate UV coated lens
- Automatic pressure equalizing vent for maintenance free travel
- Texture black powder coat stainless steel mounting bracket and black stainless steel hardware
- High pressure cast aluminum alloy housing for clean looks and functional heat sink



NO DRILL
EASY INSTALL

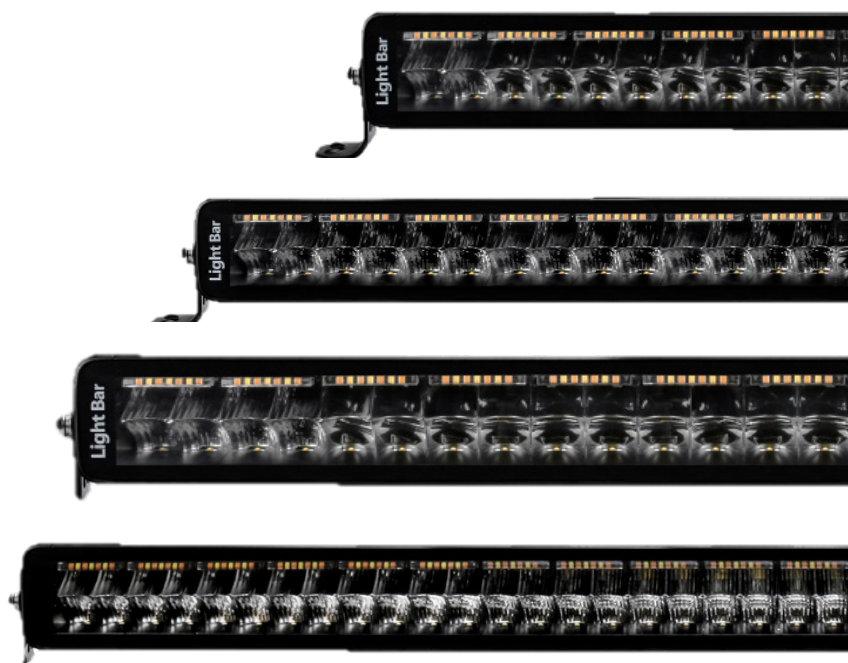

Size	22"	32"	42"	50"
LED Chip	OSRAM 40pcs @ 5W	OSRAM 60pcs @ 5W	OSRAM 80pcs @ 5W	OSRAM 96pcs @ 5W
Power	200W	300W	400W	480W
Raw Lumen	16800 lm	7867 lm	33600 lm	40320 lm
Effective Lumen	5551 lm	7867 lm	9154 lm	11086 lm
Voltage	10 - 30V DC	10 - 30V DC	10 - 30V DC	10 - 30V DC
Amp Draw	6.86/12V - 3.46/24V	9.20/12V - 4.70/24V	13.5/12V - 6.50/24V	17.50/12V - 8.20/24V
Lux@10m	1703	1703	1720	1814
Beam Pattern	Combo	Combo	Driving	Driving
Mount	Double Side Mount	Double Side Mount	Double Side Mount	Double Side Mount

XPLOR LIGHTING

BLACKOUT COMBO SERIES

SINGLELINE COMBO

The SINGLELINE COMBO's expansive field of view allows you to see far and wide.

Available with additional white and amber marker lights, in both constant and flash functionality, now others can see you from afar. Strategically engineered with just 1.5" of overall height and side mount capability, this low-profile, space saving powerhouse fits nearly anywhere on your vehicle. This sleek, high-performance light bar is available in three lengths – 20", 32", and 40". With output ranging between 6,300 to 12,600 raw Lumens, the SINGLELINE LED Light Bar shines bright as you explore the great outdoors.



- Impact and scratch resistant hard coated clear polycarbonate UV coated lens
- Automatic pressure equalizing vent for maintenance free travel
- Texture black powder coat stainless steel mounting bracket and black stainless steel hardware
- High pressure cast aluminum alloy housing for clean looks and functional heat sink

Size	20"	32"	40"
LED Chip	OSRAM 15pcs @ 5W	OSRAM 24pcs @ 5W	OSRAM 30pcs @ 5W
Power	75W	120W	150W
Raw Lumen	6300 lm	10800 lm	12600 lm
Effective Lumen	3400 lm	5646 lm	6800 lm
Voltage	10 - 30V DC	10 - 30V DC	10 - 30V DC
Amp Draw	4.98/12V - 2.42/24V	7.80/12V - 3.80/24V	9.60/12V - 4.80/24V
Color Temperature	6000K	6000K	6000K
Lux@10m	2160	2140	1982
Beam Pattern	Combo	Combo	Combo
Mount	Double Side Mount	Double Side Mount	Double Side Mount



NO DRILL
EASY INSTALL



GO RHINO®

XPLOR LIGHTING


BLACKOUT SERIES CUBEIT 2"

The unique CUBEIT 2" size light packs a punch.

Powered by 4 OSRAM 5 watt LEDs, for a total of 20 watts. Available in spot or flood optics, these lights emit a bright white 6000K beam that will illuminate your path, no matter where your adventures take you.



- Impact and scratch resistant hard coated clear polycarbonate UV coated lens
- Automatic pressure equalizing vent for maintenance free travel
- Texture black powder coat stainless steel mounting bracket and black stainless steel hardware
- High pressure cast aluminum alloy housing for clean looks and functional heat sink

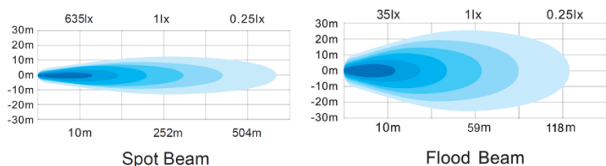

LED Chip	OSRAM 4pcs @ 5W
Power	20W
Raw Lumen	1920 lm
Voltage	10-30V DC
Amp Draw	1.50/12V – 0.75/24V
Color Temperature	6000K
Lux@10m	635 (Spot) - 35 (Flood)
Beam Pattern	Spot & Flood
Mount	Surface Mount



NO DRILL
EASY INSTALL



XPLOR LIGHTING


BLACKOUT SERIES CUBEIT 3"

The CUBEIT 3" is a powerful light in a traditional size.

Powered by 4 OSRAM 10 watt LEDs, for a total of 40 watts. Available as surface mount and flush mount, spot or flood optics, these lights emit a bright white 6000K beam that can virtually mount in any location.



- Impact and scratch resistant hard coated clear polycarbonate UV coated lens
- Automatic pressure equalizing vent for maintenance free travel
- Texture black powder coat stainless steel mounting bracket and black stainless steel hardware
- High pressure cast aluminum alloy housing for clean looks and functional heat sink

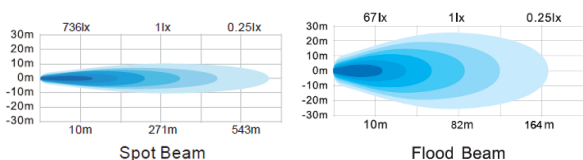

LED Chip	OSRAM 4pcs @ 10W
Power	40W
Raw Lumen	4800 lm
Voltage	10-30V DC
Amp Draw	3.39/12V – 1.62/24V
Color Temperature	6000K
Lux@10m	736 (Spot) - 28 (Flood)
Beam Pattern	Spot & Flood
Mount	Surface Mount – Flush Mount Available



NO DRILL
EASY INSTALL



XPLOR LIGHTING


BLACKOUT SERIES SIDELINE

The SIDELINE brings the power!

Powered by 7 OSRAM 10 watt LEDs, for a total of 70 watts. The side LEDs throw a broad pattern that's perfect for ditch lights. Available in spot or flood optics, these lights emit a bright white 5700K beam. The SIDELINE is a unique size and shape.



- Impact and scratch resistant hard coated clear polycarbonate UV coated lens
- Automatic pressure equalizing vent for maintenance free travel
- Texture black powder coat stainless steel mounting bracket and black stainless steel hardware
- High pressure cast aluminum alloy housing for clean looks and functional heat sink

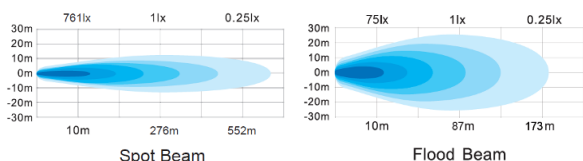

LED Chip	OSRAM 7pcs @ 10W
Power	70W
Raw Lumen	8400 lm
Voltage	10-30V DC
Amp Draw	3.24/12V – 1.65/24V
Color Temperature	5700K
Beam Pattern	Spot & Flood
Mount	Surface Mount – Flush Mount Available



NO DRILL
EASY INSTALL



XPLOR LIGHTING



BLACKOUT SERIES SIXLINE

The SIXLINE is powered by 6 OSRAM 5 watt LEDs, for a total of 30 watts.

Available in spot or flood optics, these lights emit a bright white 6000K beam. With a versatile single stud mount the SIXLINE can be installed virtually anywhere. The SIXLINE is also available with a flush mount bezel option.



- Impact and scratch resistant hard coated clear polycarbonate UV coated lens
- Automatic pressure equalizing vent for maintenance free travel
- Texture black powder coat stainless steel mounting bracket and black stainless steel hardware
- High pressure cast aluminum alloy housing for simple clean looks and functional heat sink

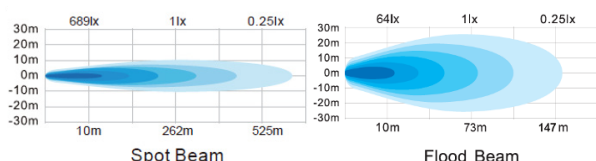

NO DRILL
EASY INSTALL




LED Chip	OSRAM 6pcs @ 5W
Power	30W
Raw Lumen	2880 lm
Voltage	10-30V DC
Amp Draw	2.04/12V - 1.04/24V
Color Temperature	6000K
Lux@10m	854 (Spot) - 64 (Flood)
Beam Pattern	Spot & Flood
Mount	Surface Mount - Flush Mount Available

XPLOR LIGHTING

BLACKOUT SERIES DOUBLELINE

The DOUBLELINE LED Light Bar!

Meticulously designed for outdoor adventurers who crave a powerful yet versatile lighting solution. This robust, high performance light bar is available in three lengths 21.5", 30", and 40" with power outputs ranging from 200, 300 and 400 watts respectively with staggering 16,800, 25,200 and 33,600 Raw Lumens.

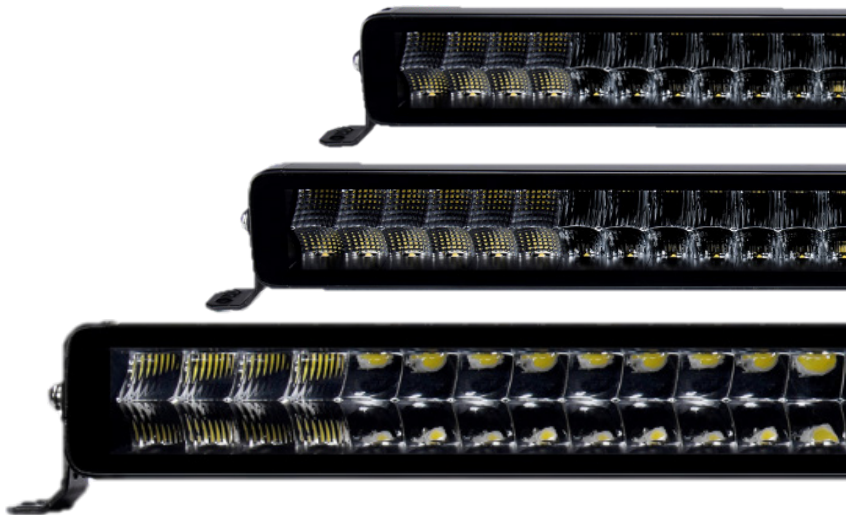

- Impact and scratch resistant hard coated clear polycarbonate UV coated lens
- Automatic pressure equalizing vent for maintenance free travel
- Texture black powder coat stainless steel mounting bracket and black stainless steel hardware
- High pressure cast aluminum alloy housing for clean looks and functional heat sink

Size	21.5"	30"	40"
LED Chip	OSRAM 40pcs @ 5W	OSRAM 60pcs @ 5W	OSRAM 80pcs @ 5W
Power	200W	300W	400W
Raw Lumen	16800 lm	25200 lm	33600 lm
Effective Lumen	4860 lm	7843 lm	9720 lm
Voltage	10 - 30V DC	10 - 30V DC	10 - 30V DC
Amp Draw	6.86/12V - 3.46/24V	9.20/12V - 4.70/24V	13.5/12V - 6.50/24V
Color Temperature	6000K	6000K	6000K
Lux@10m	2319	2350	2490
Beam Pattern	Combo	Combo	Combo
Mount	Double Side Mount	Double Side Mount	Double Side Mount



NO DRILL
EASY INSTALL



XPLOR LIGHTING

BLACKOUT SERIES SINGLELINE

Experience unmatched visibility with combination spot and flood optics.

The SINGLELINE's expansive field of view allows you to see far and wide, ensuring that no hidden landscapes or lurking dangers evade your watchful eye. Strategically engineered with just 1.5" of overall height and side mount capability, this low profile, space saving powerhouse fits nearly anywhere on your vehicle. This sleek, high performance light bar is available in three lengths 20", 32", and 40" allowing you to choose the size that best complements your trip. With an output ranging between 6,300 to 12,600 raw Lumens, the SINGLELINE LED Light Bar shines as you explore the great outdoors.



- Impact and scratch resistant hard coated clear polycarbonate UV coated lens
- Automatic pressure equalizing vent for maintenance free travel
- Texture black powder coat stainless steel mounting bracket and black stainless steel hardware
- High pressure cast aluminum alloy housing for clean looks and functional heat sink

Size	20"	32"	40"
LED Chip	OSRAM 15pcs @ 5W	OSRAM 24pcs @ 5W	OSRAM 30pcs @ 5W
Power	75W	120W	150W
Raw Lumen	6300 lm	10800 lm	12600 lm
Voltage	10 - 30V DC	10 - 30V DC	10 - 30V DC
Amp Draw	4.98/12V - 2.42/24V	7.80/12V - 3.80/24V	9.60/12V - 4.80/24V
Color Temperature	6000K	6000K	6000K
Lux@10m	2160	2140	1982
Beam Pattern	Combo	Combo	Combo
Mount	Double Side Mount	Double Side Mount	Double Side Mount



NO DRILL
EASY INSTALL



XPLOR LIGHTING


BLACKOUT SERIES MAXLINE

If you want max power with max capabilities then the MAXLINE is what you want.

All MAXLINE LEDs are equipped with both high beam spot optics and low beam driving optics as well as both white and amber daytime running light rings. The 9" is rated at a whopping 144 watts while the 7" comes in at 108 watts. The blackout reflector and unique shape and style of these lights sets them apart from the crowd.



- Impact and scratch resistant hard coated clear polycarbonate UV coated lens
- Automatic pressure equalizing vent for maintenance free travel
- Texture black powder coat stainless steel mounting bracket and black stainless steel hardware
- High pressure cast aluminum alloy housing for clean looks and functional heat sink

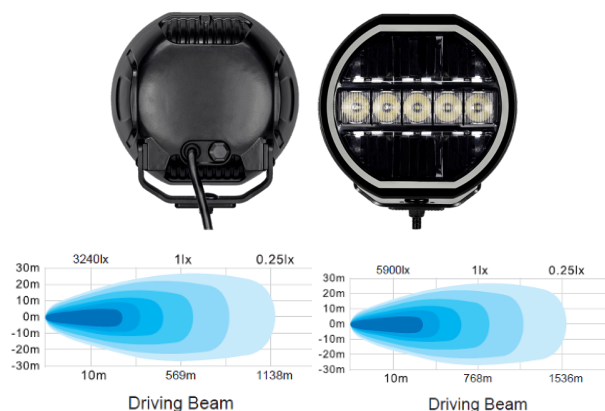

MADE IN
NORTH AMERICA



NO DRILL
EASY INSTALL



LIMITED
LIFETIME
WARRANTY

5 YEAR
FINISH
WARRANTY

Size	9"	7"
LED Chip	OSRAM 24pcs @ 6W	OSRAM 18pcs @ 6W
Rated Power	144W	108W
ECE R149 Power	20.5W	16.5W
Super bright Power	128W	72W
Effective Lumen	1269 lm (low) 4773-7436 (Hi)	1082 lm (low) 3600-5800 (Hi)
Voltage	10-30V DC	10-30V DC
Color Temperature	6000K	6000K
Lux@10m	1025 (Low) 3250-5830 (Hi)	800 (Low) 2878-4639 (Hi)
Beam Pattern	Spot & Driving	Spot & Driving
Mount	Surface Mount	Surface Mount

XPLOR LIGHTING

BLACKOUT SERIES MAXROUND

MAXROUND means max power!

Available in 9" and 7" diameters both with daytime running light rings included. The 9" MAXROUND pushes the limits of power with 170 watts for a staggering 14,280 Raw Lumens. The 7" MAXROUND serves up 80 watts of power for 6,720 Raw Lumens.



- Impact and scratch resistant hard coated clear polycarbonate UV coated lens
- Automatic pressure equalizing vent for maintenance free travel
- Texture black powder coat stainless steel mounting bracket and black stainless steel hardware
- High pressure cast aluminum alloy housing for clean looks and functional heat sink



Size	9" Round	7" Round
LED Chip	OSRAM 34pcs @ 5W	OSRAM 16pcs @ 5W
Power	170W	80W
Raw Lumen	14280 lm	6720 lm
Voltage	10-30V DC	10-30V DC
Amp Draw	2.04/12V-1.04/24V	2.04/12V - 1.04/24V
Color Temperature	6000K	6000K
Lux@10m	8104 (Spot) - 1577 (Driving)	3798 (Spot) - 1 137 (Driving)
Beam Pattern	Spot & Driving	Spot & Driving
Mount	Single threaded stud	Single threaded stud



NO DRILL
EASY INSTALL



XPLOR LIGHTING

FLASH SERIES

Multi function, white, red and amber LED bar in an amazingly thin, less than 1" (0.9") tall, housing.

Red brake light, white running light, amber running light with a white flood light all in one unit! High-pressure cast aluminum housing, patented all black optical luminous surface with no hardware and a seamless polycarbonate lens. Available in 10", 20" and 30" lengths with adjustable mounting brackets included.



- Impact and scratch resistant hard coated clear polycarbonate UV coated lens
- Automatic pressure equalizing vent for maintenance free travel
- Texture black powder coat stainless steel mounting bracket and black stainless steel hardware
- High pressure cast aluminum alloy housing for clean looks and functional heat sink

Size	10"	20"	30"
Effective Power	6.9W	5W	6.8W
Voltage	10 - 30V DC	10 - 30V DC	10 - 30V DC
Amp Draw	0.09/12V - 0.01/24V	0.03/12V - 0.56/24V	0.04/12V - 0.69/24V
Mount	Rear Track Mount	Rear Track Mount	Rear Track Mount



NO DRILL
EASY INSTALL

